

We Outlast the Competition and Look Good Doing it!


Ideal Roofing's R-Panel is versatile, durable and is unmatched in quality and we back it with our 40-year warranty. With an extensive range of colours, we provide the best options for exposed fastener steel panel siding in the industry. Elegant and practical, it's the best in class.



- **Ideal for both wall and roof applications**
- **Protects against harsh weather**
- **Cost-effective and easy installation**
- **Perfectly suited for large industrial buildings**

Available Colours

- | | |
|-----------------|-------------|
| Ash Grey | Dark Brown |
| Black | Tan |
| Bright Red | White |
| Burnished Slate | Regent Grey |
| Charcoal | Heron Blue |
| Forest Green | Galvalume |

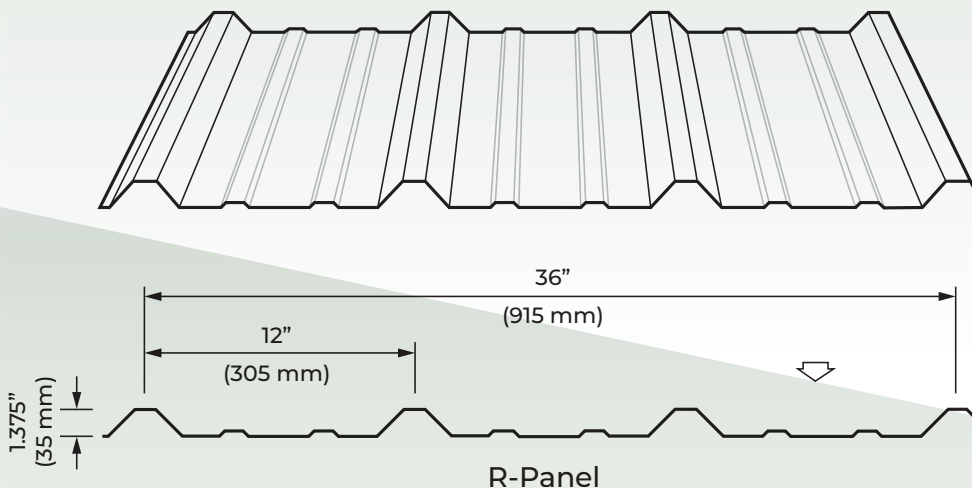

STEEL PANELS


 ENVIRONMENT-FRIENDLY.
 THIS PRODUCT IS
 ENTIRELY RECYCLABLE.

 Canadian Sheet Steel Building Institute
 A division of the Canadian Institute of Steel Construction


Head Office
 1418 Michael Street
 Ottawa, ON K1B 3R2
 Tel.: 613-746-3206
Toll Free: 1 800-267-0860
 Fax: 613-746-0445
 info@idealroofing.ca

Toronto Manufacturing Facility
 223 Corporation Drive
 Brampton, ON L6S 6G5
 Tel.: 905-792-4354
Toll Free: 1 877-792-4354
 Fax: 905-792-7740

Moncton Manufacturing Facility
 650 Frenette Avenue
 Moncton, NB E1H 0N3
 Tel.: 506-857-3888
Toll Free: 1 833-753-0051
 Fax: 506-857-8823

Quebec Regional Office
 5240 Wilfrid-Hamel Boulevard
 Québec, QC G2E 2G9
 Tel.: 418-874-0010
Toll Free: 1 888-313-0010
 Fax: 418-874-0011

www.idealroofing.com

SECTION PROPERTIES

IMPERIAL						
SECTION PROPERTIES (PER FOOT OF WIDTH)						
Total Nominal Thickness (in.)	Base Steel Thickness (in.)	Coated Weight (psf)	Yield Stress (ksi)	Section Modulus		Deflection Moment of Inertia (in ⁴)
				Midspan (in ³)	Support (in ³)	
0.021	0.018	0.93	33	0.0367	0.0312	0.0362

METRIC						
SECTION PROPERTIES (PER METRE OF WIDTH)						
Total Nominal Thickness (mm)	Base Steel Thickness (mm)	Coated Weight (kg/m ²)	Yield Stress (MPa)	Section Modulus		Deflection Moment of Inertia (10 ⁶ mm ⁴)
				Midspan (10 ³ mm ³)	Support (10 ³ mm ³)	
0.533	0.457	4.56	230	1.97	1.68	0.0495

LOAD TABLE FOR ROOFING APPLICATION

IMPERIAL				
Maximum Uniformly Distributed Specified Loads (psf)				
LLF=1.5; IMPF=0.90; Normal Occupancy=1.0				
Span length (ft)		Nominal Steel Thickness 26 Gauge / 0.021"		
		1-Span	2-Span	3-Span
2.0	S	121	103	129
	D	439	1,045	830
2.5	S	78	66	82
	D	225	535	425
3.0	S	54	46	57
	D	130	310	246
3.5	S	40	34	42
	D	82	195	155
4.0	S	30	26	32
	D	55	131	104
4.5	S	24	20	25
	D	39	92	73
5.0	S	19	16	21
	D	28	67	53
5.5	S	16	14	17
	D	21	50	40
6.0	S	13	11	14
	D	16	39	31

Specified Web Crippling Data			
P _{e1} End (lb)	P _{e2} End (lb)	P _{i1} Interior (lb)	P _{i2} Interior (lb)
23.1	5.77	43.9	7.47

METRIC				
Maximum Uniformly Distributed Specified Loads (kPa)				
LLF=1.5; IMPF=0.90; Normal Occupancy=1.0				
Span length (m)		Nominal Steel Thickness 26 Gauge / 0.533 mm		
		1-Span	2-Span	3-Span
0.6	S	6.04	5.14	6.42
	D	22.1	52.5	41.7
0.8	S	3.40	2.89	3.61
	D	9.30	22.1	17.6
1.0	S	2.18	1.85	2.31
	D	4.76	11.3	9.00
1.2	S	1.51	1.28	1.61
	D	2.76	6.56	5.21
1.4	S	1.11	0.94	1.18
	D	1.74	4.13	3.28
1.6	S	0.85	0.72	0.90
	D	1.16	2.77	2.20
1.8	S	0.67	0.57	0.71
	D	0.82	1.94	1.54
2.0	S	0.54	0.46	0.58
	D	0.60	1.42	1.13

Specified Web Crippling Data			
P _{e1} End (kN)	P _{e2} End (kN)	P _{i1} Interior (kN)	P _{i2} Interior (kN)
0.340	0.0850	0.648	0.110

LOAD TABLE FOR SIDING APPLICATION

IMPERIAL				
Maximum Uniformly Distributed Specified Loads (psf)				
LLF=1.4; IMPF=0.90; Normal Occupancy=1.0				
Span length (ft)		Nominal Steel Thickness 26 Gauge / 0.021"		
		1-Span	2-Span	3-Span
2.0	S	130	110	138
	D	527	1,254	996
2.5	S	83	71	88
	D	270	642	510
3.0	S	58	49	61
	D	156	372	295
3.5	S	42	36	45
	D	98	234	186
4.0	S	32	28	34
	D	66	157	124
4.5	S	26	22	27
	D	46	110	87
5.0	S	21	18	22
	D	34	80	64
5.5	S	17	15	18
	D	25	60	48
6.0	S	14	12	15
	D	20	46	37

Specified Web Crippling Data			
P _{e1} End (lb)	P _{e2} End (lb)	P _{i1} Interior (lb)	P _{i2} Interior (lb)
24.7	6.18	47.1	8.00

METRIC				
Maximum Uniformly Distributed Specified Loads (kPa)				
LLF=1.4; IMPF=0.90; Normal Occupancy=1.0				
Span length (m)		Nominal Steel Thickness 26 Gauge / 0.533 mm		
		1-Span	2-Span	3-Span
0.6	S	6.48	5.51	6.88
	D	26.5	63.0	50.0
0.8	S	3.64	3.10	3.87
	D	11.2	26.6	21.1
1.0	S	2.33	1.98	2.48
	D	5.72	13.6	10.8
1.2	S	1.62	1.38	1.72
	D	3.31	7.87	6.25
1.4	S	1.19	1.01	1.26
	D	2.08	4.96	3.94
1.6	S	0.91	0.77	0.97
	D	1.40	3.32	2.64
1.8	S	0.72	0.61	0.76
	D	0.98	2.33	1.85
2.0	S	0.58	0.50	0.62
	D	0.71	1.70	1.35

Specified Web Crippling Data			
P _{e1} End (kN)	P _{e2} End (kN)	P _{i1} Interior (kN)	P _{i2} Interior (kN)
0.365	0.0910	0.694	0.118

- Notes:**
1. Based on ASTM A 653 structural steel.
 2. Values in row "S" are based on strength.
 3. Values in row "D" are based on deflection of SPAN/180.
 4. Web crippling not included in strength calculations.
 5. Limit States Design principles were used in accordance with CSA Standard S136-16.